



The freedom of choice

New design, new development, full-stack self-developed



(0)



450w

10_{inch}

 50_{km}

Max output power

2.7 Ultra wide tubeless tire

Long battery life



3s

~****



2_{Places}

3s

Spring suspension

Quick fold



Rear wheel quick release

Controller

Elbow for quick release



1_{Body}

Aluminum alloy frame



175_{mm}

Pedal width

Comprehensive upgrade Long battery life


Embedded removable battery, adding quick release. Locking screw design, better fix the battery Not loose.

50_{km} Long battery life

13_{Ah}

Lithium battery


*Tips: Actual battery life may vary due to factors such as load, temperature, wind speed, road surface and operating habits.

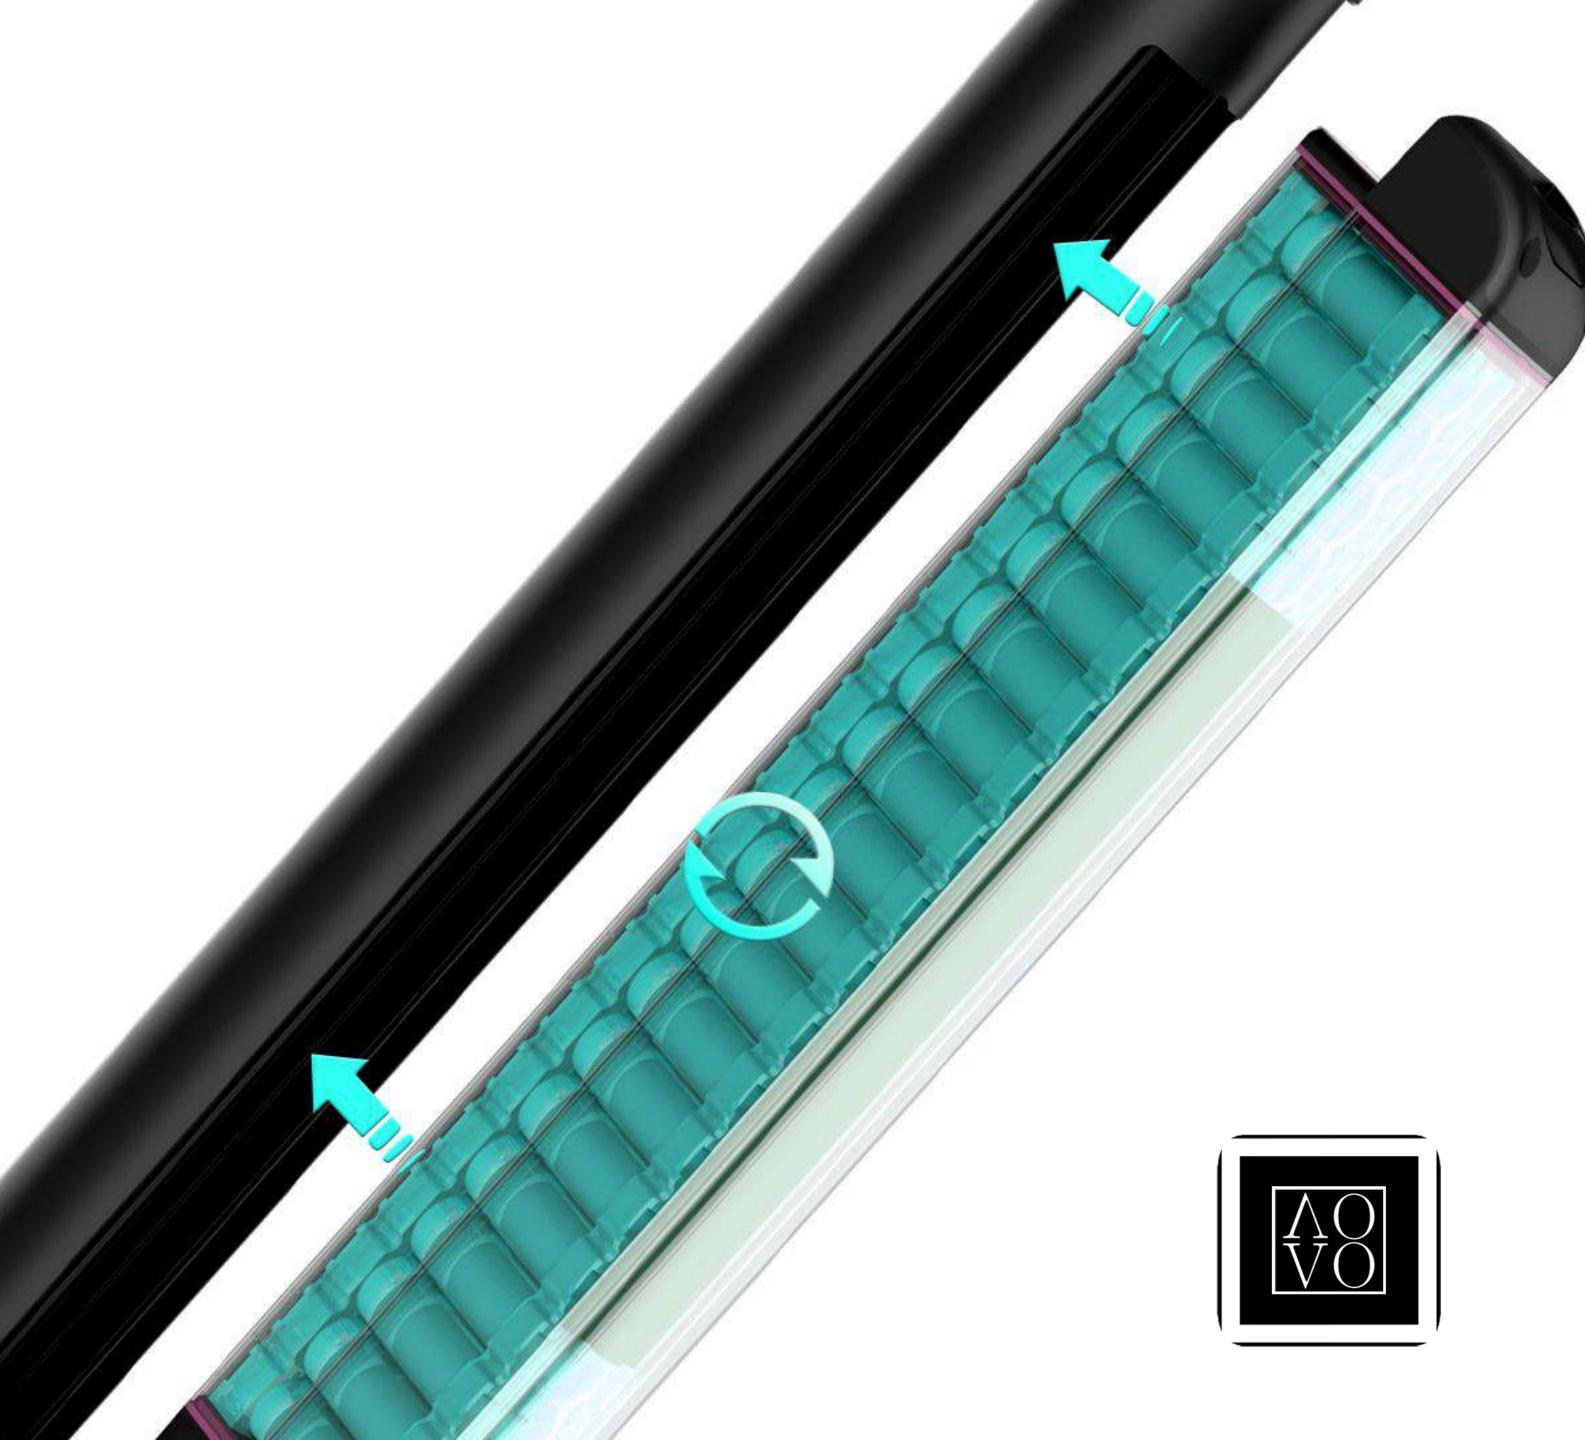


13Ah

Automotive-grade power lithium battery


6 large battery intelligent protection



protection




double over-




over-current protection



Abnormal




double overcharging protection



under-voltage

output protection temperature protection sleep automatically

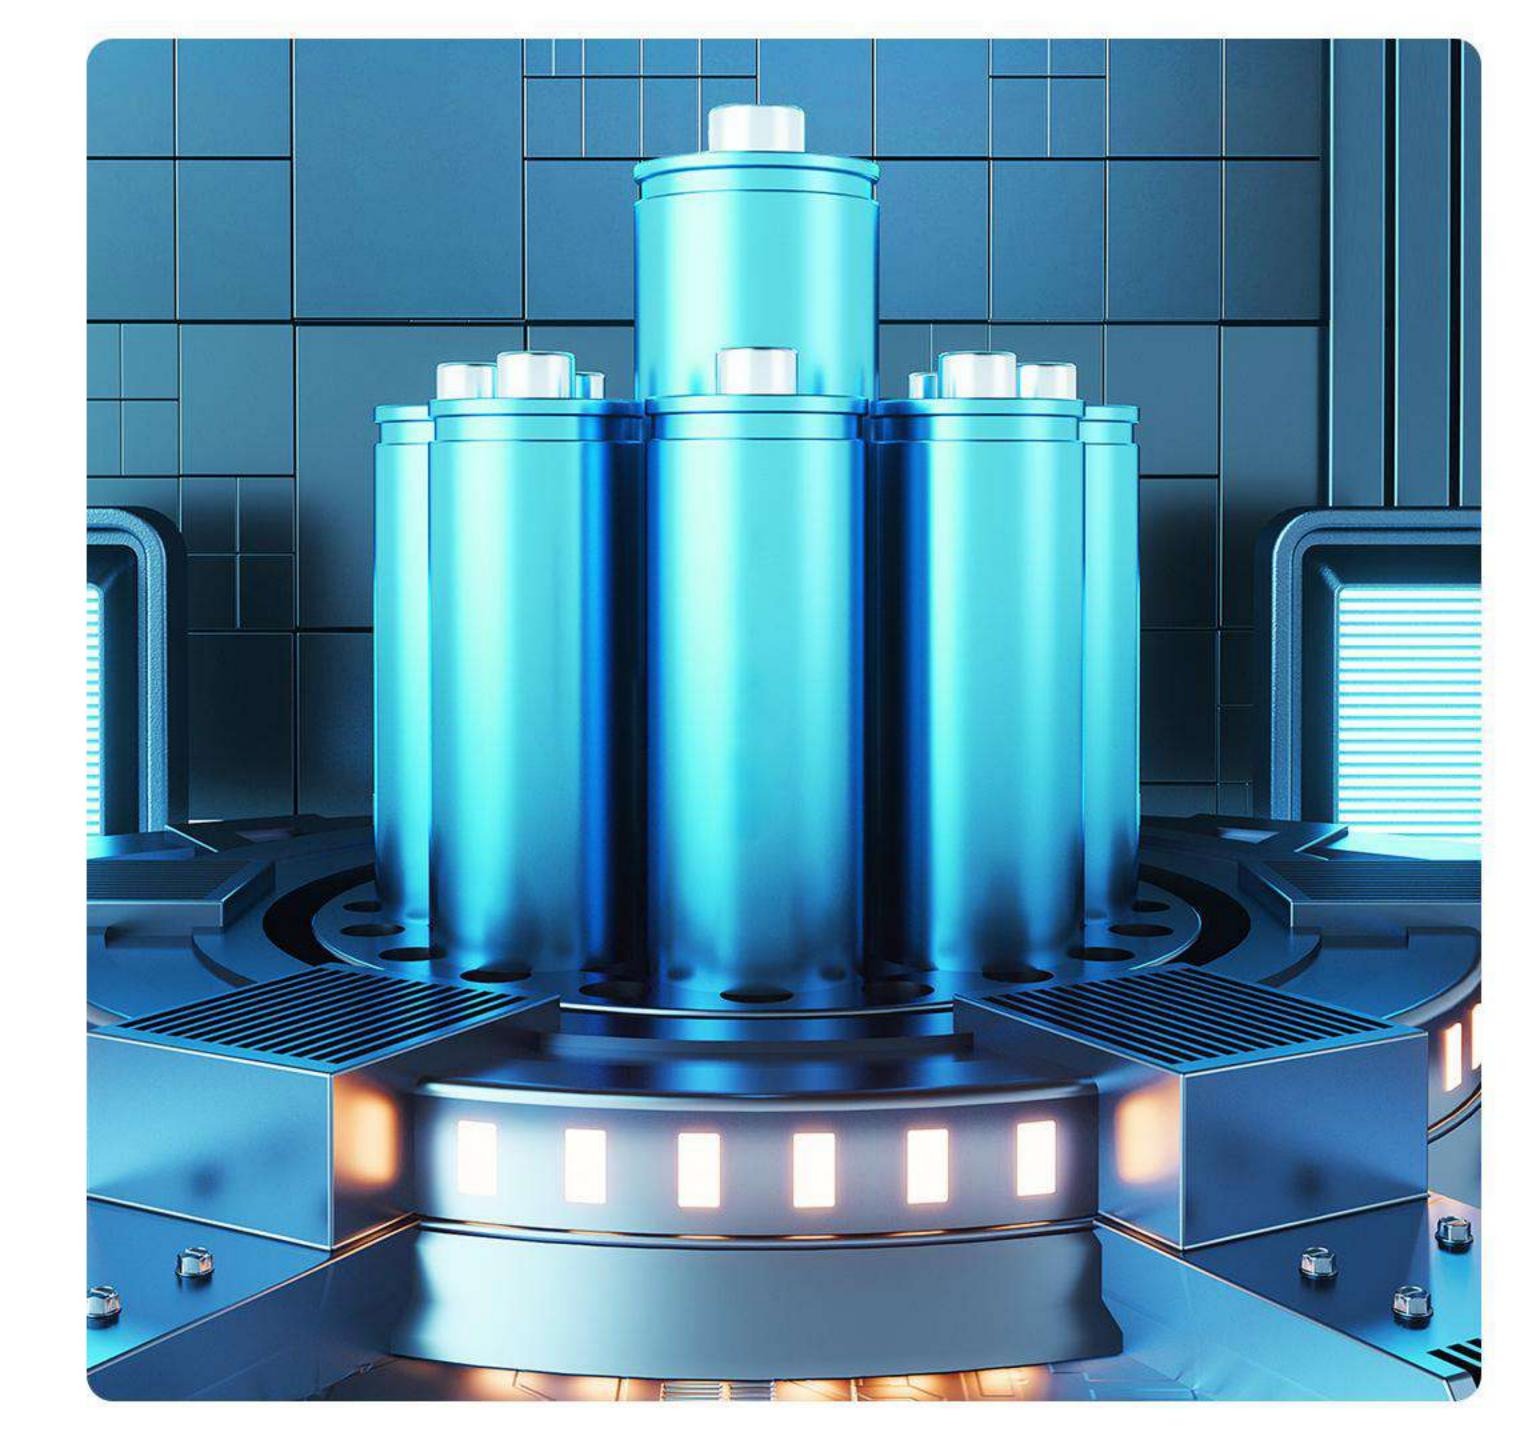

Brand new design U-shaped suspension pedals


Soft lines, smooth body, Create a sense of dynamism ready to go, Strong aluminum alloy lightweight frame, Wear-resistant and compression-resistant.

 15_{kg}

Max speed

100_{kg}

Max weight

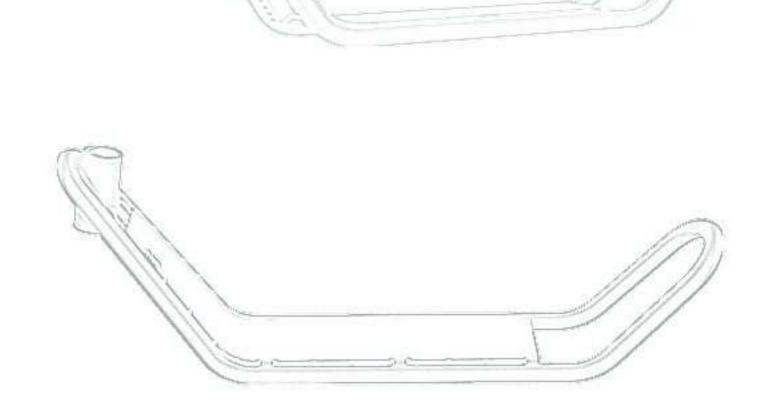





The new upgrade
High-speed brushless
power motor


10 Inch 2.7 Ultra wide road tubeless tire. Anti-skid, anti-puncture, explosion-proof, wear-resistant.

10 inch

450_W Power motor





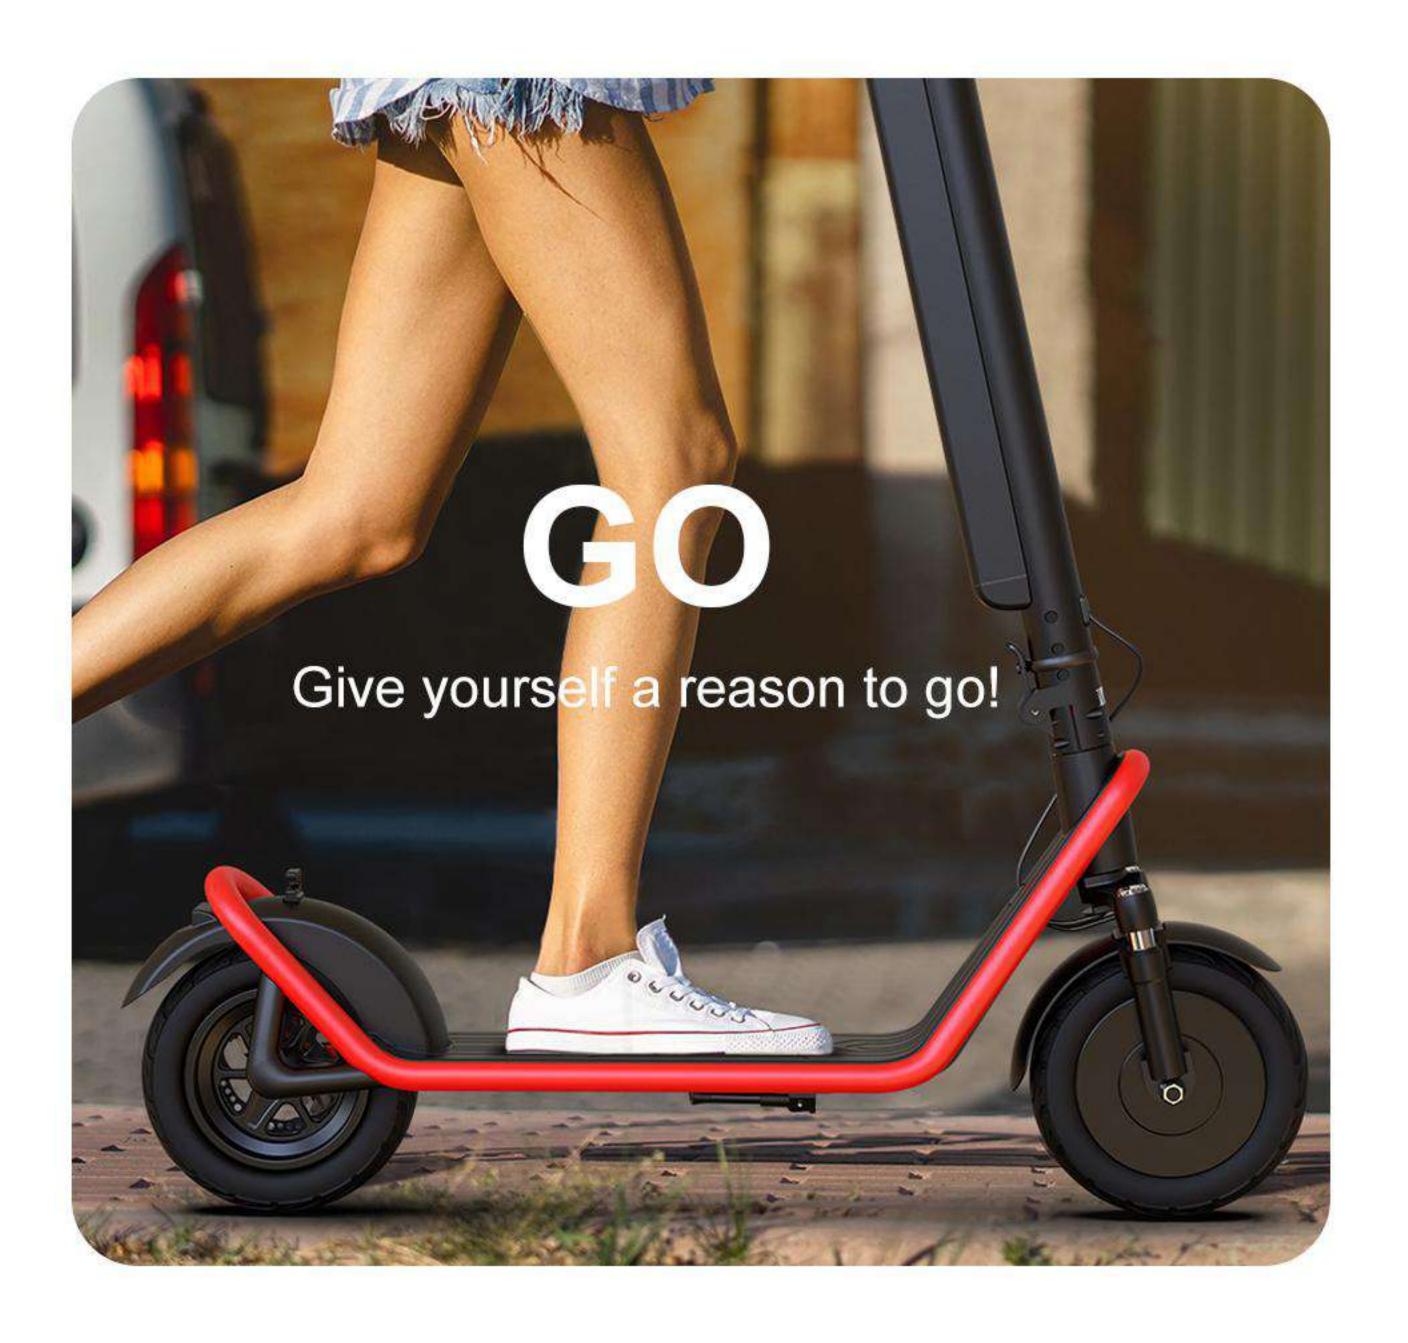

WC Controller adds spring device

The controller is mounted on the elbow for quick release





No worries after sale Rear wheel quick release

3 seconds quick disassembly and replacement, turn the screw. Easy to replace, reducing the difficulty of after-sales.



3 s quick disassembly and replacement,

Hard strengthening Integral design of rear fender

The rear fender adopts a one-piece design, with few parts for easy maintenance. Enhanced performance security.

X11 Pedal width:175mm fewer parts, easy maintenance.

X8 Pedal width:145mm Rear fender Overall design with

175_{mm} Pedal width

Rear fender Brakeable more parts



Multi-function dynamic real-time visibility, accurate display of speed, power, gear switching, etc., preview your car at any time.




Push-to-accelerate shifter design

Waterproof dial design, one touch to accelerate. Long press the accelerator for more than 6 seconds to cruise.



Classic retention LED night lighting system

Super bright headlights, the driving environment on the road ahead is unobstructed, and the illumination distance is long, ensuring the safety of riding at night.

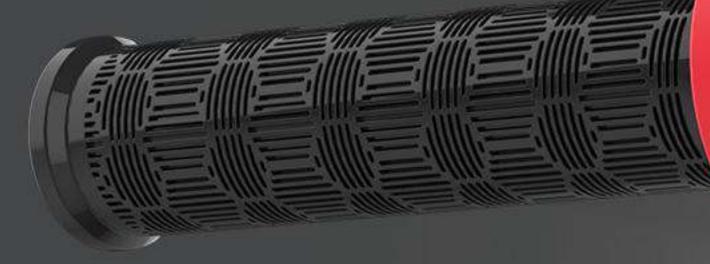

Tail warning light

Safety flashing warning light, light when braking Lighting is clearly visible even from a distance.





Innovative design 3 Seconds quick fold rotary clasp

One turn, one click, one buckle, minimalist ring-type folding buckle design, small storage space, and can be easily lifted with one hand.

3s Quick fold

1130_{mn} E-scooter width





Hand hel



In the elevator



Trunk

Safe braking Efficient and stable braking performance

Equipped with ventilated disc brake system

E-ABS anti-lock braking system.

Efficient braking and quick response.



Electronic brake



Rear mechanical disc brake





Open size:1130x410x1260mm



Folding size:1130x410x550mm

| Model | X11 Long battery life off-road e-scooter |
|-----------------------------------|--|
| Open Size | 1130*410*1260mm |
| Fold Size | 1130*410*550mm |
| Net Weight | 14kg |
| Frame Material | Aluminum alloy |
| Tire Size | 10 inch |
| Max Range | 40-50km |
| Speed | 25km/h |
| Rated power | 36V/450W |
| Climbing Angel | 20° |
| Pedal Width | 175mm |
| Ground Clearance of Pedal | 160mm |
| Ground clearance of pedal chassis | 135mm |
| Folding method | 3 Seconds quick folding |
| Battery capacity | 13Ah Li-ion battery |
| Charger parameters | DC42V/2A |
| Motor driven | Rear wheel drive |
| Battery removal method | Portable and removable |
| Naterproof level | IPX4 |
| Charging time | 5-7hours |
| neadlight | LED high-brightness front light |
| aillight | Rear LED |
| Applicable height | 120~200cm |
| _oad range | 100kg |
| nput voltage | 100-240Vac 50/60Hz |